

TECHNICAL DATA

Product type	Reverse osmosis watermaker
Application	Seawater for nautical application
Production	30 l/h $\pm 15\%$ (7,8 gal/h $\pm 15\%$) @35 ppm and 25 °C
Membrane	1x Membrane SW-2521
Rejection	99,5% (nominal)
Power supply	12 V $\pm 15\%$ DC 24 V $\pm 15\%$ DC
Absorption - Power required	9 A $\pm 15\%$ - 110 W $\pm 15\%$ (12 V) 4,5 A $\pm 15\%$ - 110 W $\pm 15\%$ (24 V)
Pump	Shurflo diaphragm pump
Pressure pump	7 - 8 bar
Flow rate pump	4,5 - 5 l/min
Water inlet temperature range	8 - 30 °C
Pre-filtration	1x 5micron filter 5"x2-1/2" 1x Active carbon filter 5"x2-1/2"
Shipping wight	37 kg
Shipping dimensions	82x50x75 cm

HYDRAULIC CONNECTIONS

PUMP / FILTERS / NR VALVE

Seawater inlet	Hose barb DN16
Seawater outlet	Hose barb DN16

WATERMAKER


Seawater inlet	Hose barb DN16
Concentrated water outlet	Hose barb DN16
Fresh water outlet	Compression fitting 1/4" for hose 6x8

CONTROL SYSTEMS AND OPTIONAL DEVICES


Electronics	Basic
Automatic flushing	Standard
Safety control	High/low pressure Low voltage
Salinity monitoring	N.A.




COMPONENTS




CONTROL PANEL
Depth: 3,6 cm – Cut dimensions: 7,6x4,4 cm




NON-RETURN VALVE
Depth: 4,7 cm




MESH FILTER GROUP
Depth: 9,1 cm

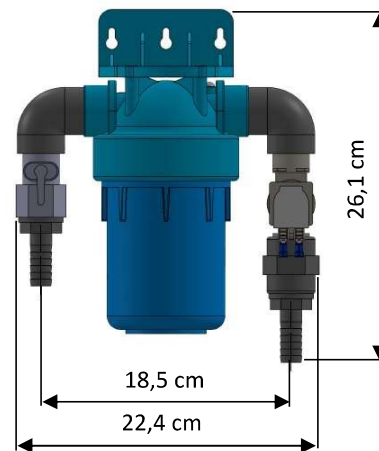


ACTIVE CARBON FILTER GROUP
Depth: 13,8 cm

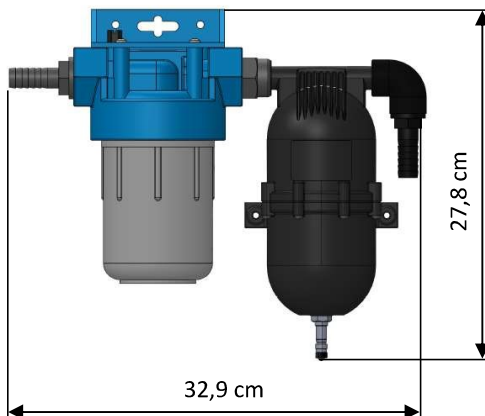

5 MICRON FILTER GROUP
Depth: 11,6 cm

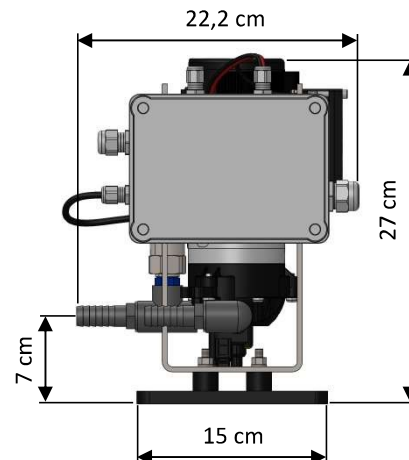


PUMP GROUP
Depth: 23 cm - Weight: 4,7 kg

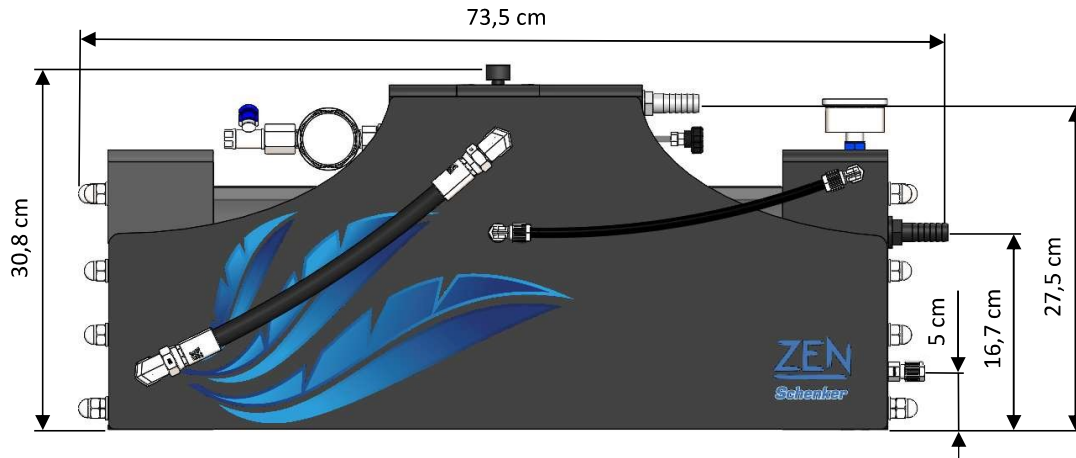

WATERMAKER
Depth: 15,3 cm - Weight: 17,6 kg

INSTALLATION SCHEME

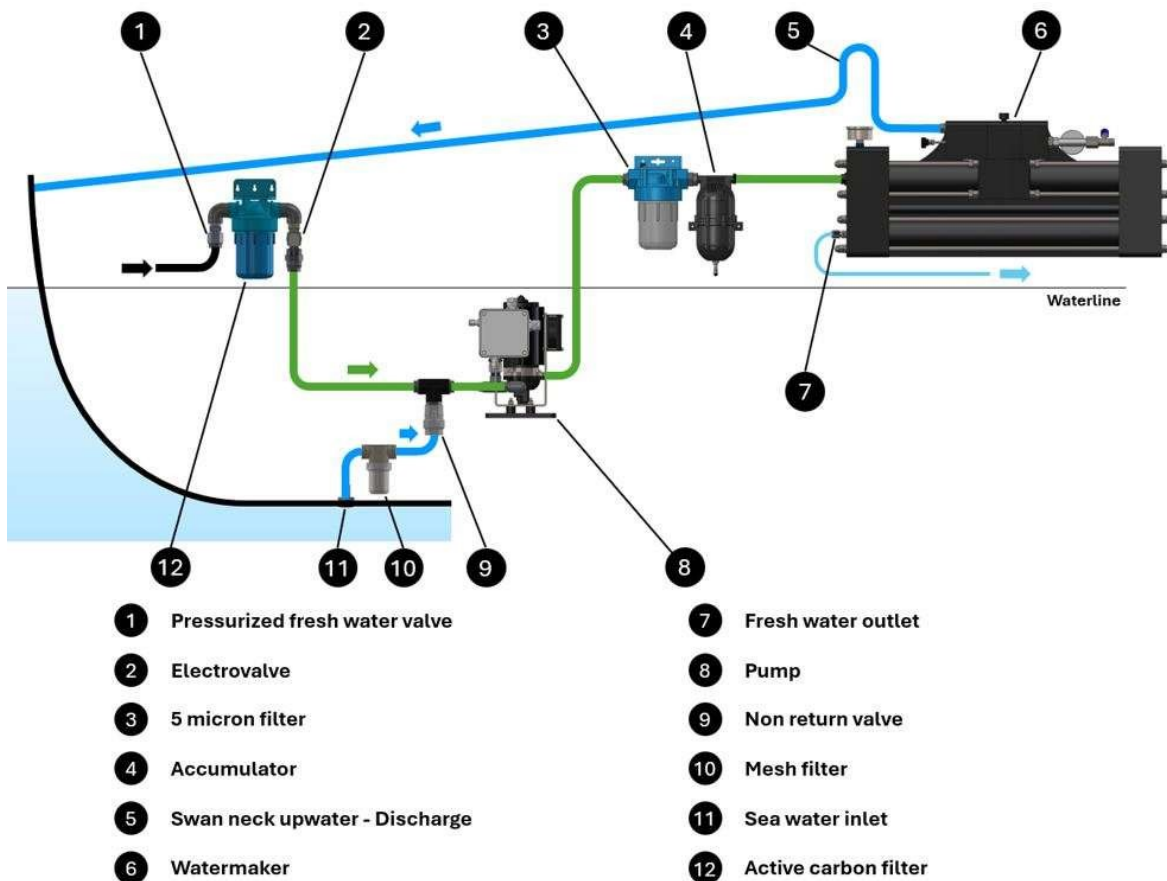

SCHENKER ITALIA s.r.l.

Via Ferrante Imparato, 499/501, Condominio Genesis

80146 NAPOLI – NA – Italia

Email: info@schenker.it

Web: <https://schenkerwatermakers.com/>

Tel. +39 0815593505 - 0815590931